


蕨市 傾斜対応型継足し棒選定表 (DIP)

継足し棒組み合わせ表 DIP各種 ソフトシール弁

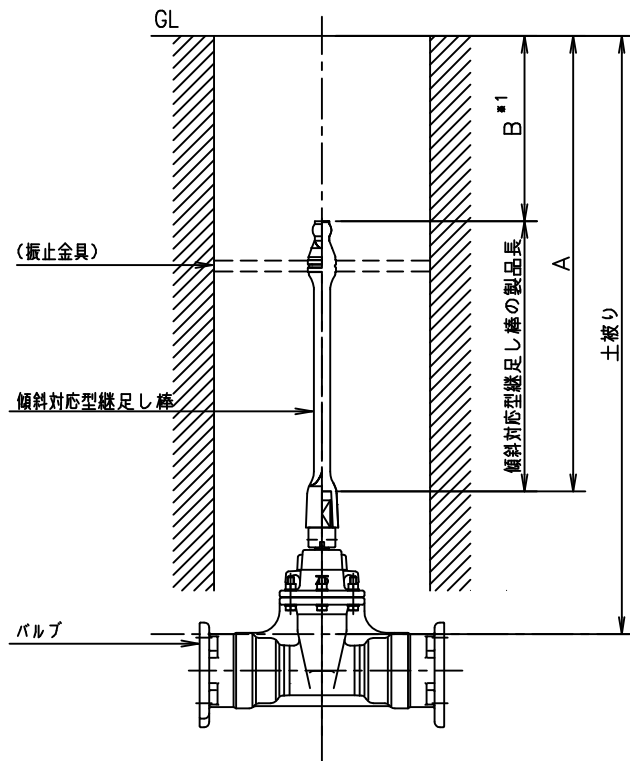

※1. B寸法をGLから300±150mm(150~450mm)の範囲内に設定する。

土被り (mm)	バルブ 呼び径	バルブH (mm)	深さ (mm)		傾斜対応型継足し棒の製品長 (mm)						
			A	B	300	500	700	1000	1300	1500	
800	75	330	508	208	○						
	100	365	485	185	○						
900	75	330	608	308	○						
	100	365	585	285	○						
	150	455	520	220	○						
	200	540	460	160	○						
	250	640	485	185	○						
1000	75	330	708	208		○					
	100	365	685	185		○					
	150	455	620	320	○						
	200	540	560	260	○						
	250	640	485	185	○						
1100	75	330	808	308		○					
	100	365	785	285		○					
	150	455	720	420	○						
	200	540	660	360	○						
	250	640	585	285	○						
	300	740	510	210	○						
1200	75	330	908	408		○					
	100	365	885	385		○					
	150	455	820	320		○					
	200	540	760	260		○					
	250	640	685	385	○						
1300	300	740	610	310	○						
	75	330	1008	308			○				
	100	365	985	285			○				
	150	455	920	420		○					
	200	540	860	360		○					
	250	640	785	285		○					
1400	300	740	710	410	○						
	75	330	1108	408			○				
	100	365	1085	385			○				
	150	455	1020	320			○				
	200	540	960	260			○				
	250	640	885	385		○					
1500	300	740	810	310		○					
	350	1110	465	165	○						
	75	330	1208	208				○			
	100	365	1185	185				○			
	150	455	1120	420			○				
	200	540	1060	360			○				
1600	250	640	985	285			○				
	300	740	910	410		○					
	350	1110	565	265	○						
	400	1240	460	160	○						

土被り (mm)	バルブ 呼び径	バルブ (mm)	深さ (mm)		傾斜対応型継足し棒の製品長 (mm)						
			A	B	300	500	700	1000	1300	1500	
1600	75	330	1308	308				○			
	100	365	1285	285				○			
	150	455	1220	220				○			
	200	540	1160	160				○			
	250	640	1085	385			○				
	300	740	1010	310			○				
	350	1110	665	165		○					
	400	1240	560	260	○						
	450	1350	475	175	○						
1700	75	330	1408	408				○			
	100	365	1385	385				○			
	150	455	1320	320				○			
	200	540	1260	260				○			
	250	640	1185	185				○			
	300	740	1110	410			○				
	350	1110	765	265		○					
	400	1240	660	360	○						
	450	1350	575	275	○						
1800	75	330	1508	208					○		
	100	365	1485	185					○		
	150	455	1420	420				○			
	200	540	1360	360				○			
	250	640	1285	285				○			
	300	740	1210	210				○			
	350	1110	865	365		○					
	400	1240	760	260		○					
	450	1350	675	375	○						
1900	500	1450	600	300	○						
	75	330	1608	308					○		
	100	365	1585	285					○		
	150	455	1520	220					○		
	200	540	1460	160					○		
	250	640	1385	385				○			
	300	740	1310	310				○			
	350	1110	965	265			○				
	400	1240	860	360		○					
2000	450	1350	775	275		○					
	500	1450	700	400	○						
	75	330	1708	408					○		
	100	365	1685	385					○		
	150	455	1620	320					○		
	200	540	1560	260					○		
	250	640	1485	185					○		
	300	740	1410	410				○			
	350	1110	1065	365			○				
2100	400	1240	960	260			○				
	450	1350	875	375		○					
	500	1450	800	300		○					