

1 数量総括表

数量総括表

[illegible]

2 ± 1

数量集計表

[illegible]

種 別	計 算 式	数 量
(1) 掘削工 1) 掘 削 土砂、小規模	道路土工土量計算書より $V = 34.1 + 33.8$	67.9 m^3
(2) 残土処理工 1) 土砂運搬 土砂、小規模	$V = 67.9$	67.9 m^3
2) 整地 残土受入	$V = 67.9$	67.9 m^3

測点間隔 20.000m

道路土工土量計算書 (1/3)									
測 点	掘 削(左側)				測 点	掘 削(右側)			
	距 離	断面積	平 均 断面積	土 量 (m3)		距 離	断面積	平 均 断面積	土 量 (m3)
N0.13 +10.532	0.00	0.04			N0.13 +9.168	0.00	0.04		
N0.14	9.47	0.04	0.04	0.4	N0.14	10.83	0.04	0.04	0.4
N0.15	20.00	0.04	0.04	0.8	N0.15	20.00	0.04	0.04	0.8
KE1-2 N0.15 +4.469	4.47	0.04	0.04	0.2	KE1-2 N0.15 +4.469	4.47	0.04	0.04	0.2
N0.16	15.53	0.04	0.04	0.6	N0.16	15.53	0.04	0.04	0.6
N0.17	20.00	0.04	0.04	0.8	N0.17	20.00	0.04	0.04	0.8
N0.18	20.00	0.04	0.04	0.8	N0.18	20.00	0.04	0.04	0.8
KA1-2, KA2-1 N0.18 +5.219	5.22	0.04	0.04	0.2	KA1-2 N0.18 +5.219	5.22	0.04	0.04	0.2
N0.19	14.78	0.05	0.05	0.7	N0.19	14.78	0.06	0.05	0.7
N0.20	20.00	0.04	0.05	1.0	N0.20	20.00	0.05	0.06	1.2
N0.20 +12.364	12.36	0.04	0.04	0.5	N0.20 +12.364	12.36	0.05	0.05	0.6
N0.20 +18.270	5.91	0.04	0.04	0.2	N0.20 +18.270	5.91	0.05	0.05	
N0.21	1.73	0.04	0.04	0.1	N0.21	1.73	0.05	0.05	0.1
KE2-1 N0.21 +5.969	5.97	0.04	0.04	0.2	KE2-1 N0.21 +5.969	5.97	0.05	0.05	0.3
N0.22	14.03	0.06	0.05	0.7	N0.22	14.03	0.04	0.05	0.7
N0.23	20.00	0.06	0.06	1.2	N0.23	20.00	0.04	0.04	0.8
N0.24	20.00	0.04	0.05	1.0	N0.24	20.00	0.04	0.04	0.8
KE2-2 N0.24 +16.212	16.21	0.04	0.04	0.6	KE2-2 N0.24 +16.212	16.21	0.04	0.04	0.6
N0.25	3.79	0.04	0.04	0.2	N0.25	3.79	0.04	0.04	0.2
N0.26	20.00	0.04	0.04	0.8	N0.26	20.00	0.04	0.04	0.8
N0.26 +6.095	6.10	0.04	0.04	0.2	N0.26 +6.712	6.71	0.04	0.04	0.3
N0.26 +10.761	4.67	0.04	0.04		N0.26 +10.821	4.11	0.04	0.04	
N0.27	9.24	0.04	0.04	0.4	N0.27	9.18	0.04	0.04	0.4
KA2-2 N0.27 +16.962	16.96	0.04	0.04	0.7	KA2-2 N0.27 +16.962	16.96	0.04	0.04	0.7
小 計	286.44			12.3 ^{m³}	小 計	287.79			12.0 ^{m³}

測点間隔 20.000m

道路土工土量計算書 (2/3)									
測 点	掘 削(左側)				測 点	掘 削(右側)			
	距 離	断面積	平 均 断面積	土 量 (m ³)		距 離	断面積	平 均 断面積	土 量 (m ³)
NO. 28	3.04	0.04	0.04	0.1	NO. 28	3.04	0.04	0.04	0.1
NO. 29	20.00	0.04	0.04	0.8	NO. 29	20.00	0.04	0.04	0.8
NO. 30	20.00	0.04	0.04	0.8	NO. 30	20.00	0.04	0.04	0.8
NO. 31	20.00	0.04	0.04	0.8	NO. 31	20.00	0.04	0.04	0.8
NO. 31 +19.520	19.52	0.04	0.04	0.8	NO. 31 +19.520	19.52	0.04	0.04	0.8
NO. 32	0.48	0.00	0.02		NO. 32	0.48	0.00	0.02	
NO. 32 +3.607	3.61	0.04	0.02		NO. 32 +3.691	3.69	0.04	0.02	
NO. 33	16.39	0.04	0.04	0.7	NO. 33	16.31	0.04	0.04	0.7
NO. 34	20.00	0.04	0.04	0.8	NO. 34	20.00	0.04	0.04	0.8
NO. 35	20.00	0.04	0.04	0.8	NO. 35	20.00	0.04	0.04	0.8
NO. 36	20.00	0.04	0.04	0.8	NO. 36	20.00	0.04	0.04	0.8
NO. 37	20.00	0.04	0.04	0.8	NO. 37	20.00	0.04	0.04	0.8
NO. 37 +12.093	12.09	0.04	0.04	0.5	NO. 37 +12.319	12.32	0.04	0.04	0.5
NO. 37 +16.925	4.83	0.06	0.05		NO. 37 +16.417	4.10	0.06	0.05	
NO. 38	3.08	0.06	0.06	0.2	NO. 38	3.58	0.06	0.06	0.2
NO. 39	20.00	0.04	0.05	1.0	NO. 39	20.00	0.04	0.05	1.0
NO. 40	20.00	0.04	0.04	0.8	NO. 40	20.00	0.04	0.04	0.8
NO. 41	20.00	0.04	0.04	0.8	NO. 41	20.00	0.04	0.04	0.8
NO. 42	20.00	0.04	0.04	0.8	NO. 42	20.00	0.04	0.04	0.8
NO. 43	20.00	0.04	0.04	0.8	NO. 43	20.00	0.04	0.04	0.8
NO. 43 +5.246	5.25	0.04	0.04	0.2	NO. 43 +5.967	5.97	0.04	0.04	0.2
NO. 43 +9.128	3.88	0.04	0.04		NO. 43 +8.940	2.97	0.04	0.04	
NO. 44	10.87	0.04	0.04	0.4	NO. 44	11.06	0.04	0.04	0.4
NO. 45	20.00	0.04	0.04	0.8	NO. 45	20.00	0.04	0.04	0.8
小 計	343.04			13.5 ^{m³}	小 計	343.04			13.5 ^{m³}

測点間隔 20.000m

道路土工土量計算書 (3/3)									
測 点	掘 削(左側)				測 点	掘 削(右側)			
	距 離	断面積	平 均 断面積	土 量 (m3)		距 離	断面積	平 均 断面積	土 量 (m3)
N0.46	20.00	0.04	0.04	0.8	N0.46	20.00	0.04	0.04	0.8
N0.47	20.00	0.04	0.04	0.8	N0.47	20.00	0.04	0.04	0.8
N0.48	20.00	0.04	0.04	0.8	N0.48	20.00	0.04	0.04	0.8
N0.48 +17.549	17.55	0.04	0.04	0.7	N0.48 +18.427	18.43	0.04	0.04	0.7
N0.49 +2.471	4.92	0.04	0.04		N0.49 +2.436	4.01	0.04	0.04	
N0.50	17.53	0.04	0.04	0.7	N0.50	17.56	0.04	0.04	0.7
N0.51	20.00	0.04	0.04	0.8	N0.51	20.00	0.04	0.04	0.8
N0.52	20.00	0.04	0.04	0.8	N0.52	20.00	0.04	0.04	0.8
N0.53	20.00	0.04	0.04	0.8	N0.53	20.00	0.04	0.04	0.8
BC.3 N0.53 +8.806	8.81	0.04	0.04	0.4	BC.3 N0.53 +8.806	8.81	0.04	0.04	0.4
N0.54	11.19	0.04	0.04	0.4	N0.54	11.19	0.04	0.04	0.4
N0.55	20.00	0.04	0.04	0.8	N0.55	20.00	0.04	0.04	0.8
N0.55 +12.434	12.43	0.04	0.04	0.5	N0.55 +12.459	12.46	0.04	0.04	0.5
小 計	212.43			8.3 ^{m³}	小 計	212.46			8.3 ^{m³}
合 計	841.91			34.1 ^{m³}	合 計	843.29			33.8 ^{m³}

3 防草コンクリート

数量集計表

[illegible]

種 別	計 算 式	数 量
(1) 防草コンクリート		
1) 基面整正	基面整正計算書より $A = 693.3 + 1,147.0 =$	1,840.3 m2
2) 張りコンクリート 機械	防草コンクリート計算書より $A = 1,107.0 + 1,574.6 =$	2,681.6 m2
3) 張りコンクリート 人力	防草コンクリート計算書より $A = 88.1 + 89.2 =$	177.3 m2
4) 防草目地	道路縦断方向 防草コンクリート計算書より $L1 = 841.9 + 843.3 = 1,685.2$ 道路横断方向(伸縮目地) 張りコンクリート面積 延長 $\text{平均幅} = (2,681.6 + 177.3) \div 1,685.2 = 1.696$ 延長 目地間隔 平均幅 $L2 = 1,685.2 \div 10.0 \times 1.696 = 285.8$ $\Sigma L = L1 + L2 = 1,685.2 + 285.8$ $= 1,971.0$	1,971.0 m

測点間隔 20.000m

基面整正計算書 (1/3)									
測 点	基面整正 (左側)				測 点	基面整正 (右側)			
	距 離	延 長	平 均 延 長	面 積 (m2)		距 離	延 長	平 均 延 長	面 積 (m2)
N0.13 +10.532		1.45			N0.13 +9.168		1.55		
N0.14	9.47	1.45	1.45	13.7	N0.14	10.83	1.55	1.55	16.8
N0.15	20.00	1.45	1.45	29.0	N0.15	20.00	0.52	1.04	20.8
KE1-2 N0.15 +4.469	4.47	1.46	1.46	6.5	KE1-2 N0.15 +4.469	4.47	0.34	0.43	1.9
N0.16	15.53	1.43	1.45	22.5	N0.16	15.53	0.27	0.31	4.8
N0.17	20.00	0.51	0.97	19.4	N0.17	20.00	0.65	0.46	9.2
N0.18	20.00	0.45	0.48	9.6	N0.18	20.00	0.55	0.60	12.0
KA1-2, KA2-1 N0.18 +5.219	5.22	0.34	0.40	2.1	KA1-2 N0.18 +5.219	5.22	0.47	0.51	2.7
N0.19	14.78	0.00	0.17	2.5	N0.19	14.78	0.00	0.24	3.5
N0.20	20.00	0.00	0.00	0.0	N0.20	20.00	0.00	0.00	0.0
N0.20 +12.364	12.36	0.00	0.00	0.0	N0.20 +12.364	12.36	0.00	0.00	0.0
N0.20 +18.270	5.91	0.00	0.00	0.0	N0.20 +18.270	5.91	0.00	0.00	
N0.21	1.73	0.00	0.00	0.0	N0.21	1.73	0.00	0.00	0.0
KE2-1 N0.21 +5.969	5.97	0.00	0.00	0.0	KE2-1 N0.21 +5.969	5.97	0.00	0.00	0.0
N0.22	14.03	0.00	0.00	0.0	N0.22	14.03	0.00	0.00	0.0
N0.23	20.00	0.00	0.00	0.0	N0.23	20.00	0.00	0.00	0.0
N0.24	20.00	0.35	0.18	3.6	N0.24	20.00	0.00	0.00	0.0
KE2-2 N0.24 +16.212	16.21	0.61	0.48	7.8	N0.24 +5.969	5.97	1.52	0.76	4.5
N0.25	3.79	0.79	0.70	2.7	N0.25	14.03	1.69	1.61	22.6
N0.26	20.00	1.11	0.95	19.0	N0.26	20.00	1.86	1.78	35.6
N0.26 +6.095	6.10	1.11	1.11	6.8	N0.26 +6.712	6.71	1.86	1.86	12.5
N0.26 +10.761	4.67	1.12	1.12		N0.26 +10.821	4.11	1.80	1.83	
N0.27	9.24	1.12	1.12	10.3	N0.27	9.18	1.80	1.80	16.5
KA2-2 N0.27 +16.962	16.96	0.92	1.02	17.3	KA2-2 N0.27 +16.962	16.96	1.49	1.65	28.0
小 計	286.44			172.8 ^{m2}	小 計	287.79			191.4 ^{m2}

測点間隔 20.000m

基面整正計算書 (2/3)									
測 点	基面整正 (左側)				測 点	基面整正 (右側)			
	距 離	延 長	平 均 延 長	面 積 (m2)		距 離	延 長	平 均 延 長	面 積 (m2)
NO. 28	3.04	0.84	0.88	2.7	NO. 28	3.04	1.51	1.50	4.6
NO. 29	20.00	0.61	0.73	14.6	NO. 29	20.00	1.27	1.39	27.8
NO. 30	20.00	0.90	0.76	15.2	NO. 30	20.00	1.40	1.34	26.8
NO. 31	20.00	1.05	0.98	19.6	NO. 31	20.00	1.49	1.45	29.0
NO. 31 +19.520	19.52	1.05	1.05	20.5	NO. 31 +19.520	19.52	1.49	1.49	29.1
NO. 32	0.48	0.00	0.53		NO. 32	0.48	0.00	0.75	
NO. 32 +3.607	3.61	0.95	0.48		NO. 32 +3.691	3.69	1.47	0.74	
NO. 33	16.39	0.95	0.95	15.6	NO. 33	16.31	1.47	1.47	24.0
NO. 34	20.00	0.91	0.93	18.6	NO. 34	20.00	1.30	1.39	27.8
NO. 35	20.00	0.43	0.67	13.4	NO. 35	20.00	0.82	1.06	21.2
NO. 36	20.00	1.04	0.74	14.8	NO. 36	20.00	1.65	1.24	24.8
NO. 37	20.00	1.34	1.19	23.8	NO. 37	20.00	1.88	1.77	35.4
NO. 37 +12.093	12.09	1.34	1.34	16.2	NO. 37 +12.319	12.32	1.88	1.88	23.2
NO. 37 +16.925	4.83	1.03	1.19		NO. 37 +16.417	4.10	1.58	1.73	
NO. 38	3.08	1.03	1.03	3.2	NO. 38	3.58	1.58	1.58	5.7
NO. 39	20.00	1.06	1.05	21.0	NO. 39	20.00	1.70	1.64	32.8
NO. 40	20.00	0.76	0.91	18.2	NO. 40	20.00	1.34	1.52	30.4
NO. 41	20.00	0.52	0.64	12.8	NO. 41	20.00	1.54	1.44	28.8
NO. 42	20.00	0.99	0.76	15.2	NO. 42	20.00	2.02	1.78	35.6
NO. 43	20.00	1.21	1.10	22.0	NO. 43	20.00	2.46	2.24	44.8
NO. 43 +5.246	5.25	1.21	1.21	6.4	NO. 43 +5.967	5.97	2.46	2.46	14.7
NO. 43 +9.128	3.88	1.19	1.20		NO. 43 +8.940	2.97	1.87	2.17	
NO. 44	10.87	1.19	1.19	12.9	NO. 44	11.06	1.87	1.87	20.7
NO. 45	20.00	0.90	1.05	21.0	NO. 45	20.00	1.42	1.65	33.0
小 計	343.04			307.7 ^{m2}	小 計	343.04			520.2 ^{m2}

測点間隔 20.000m

基面整正計算書 (3/3)									
測 点	基面整正 (左側)				測 点	基面整正 (右側)			
	距 離	延 長	平 均 延 長	面 積 (m2)		距 離	延 長	平 均 延 長	面 積 (m2)
N0.46	20.00	0.37	0.64	12.8	N0.46	20.00	1.09	1.26	25.2
N0.47	20.00	0.56	0.47	9.4	N0.47	20.00	1.26	1.18	23.6
N0.48	20.00	1.21	0.89	17.8	N0.48	20.00	1.84	1.55	31.0
N0.48 +17.549	17.55	1.21	1.21	21.2	N0.48 +18.427	18.43	1.84	1.84	33.9
N0.49 +2.471	4.92	1.22	1.22		N0.49 +2.436	4.01	2.44	2.14	
N0.50	17.53	1.22	1.22	21.4	N0.50	17.56	2.44	2.44	42.8
N0.51	20.00	1.35	1.29	25.8	N0.51	20.00	2.58	2.51	50.2
N0.52	20.00	0.97	1.16	23.2	N0.52	20.00	2.31	2.45	49.0
N0.53	20.00	1.05	1.01	20.2	N0.53	20.00	2.41	2.36	47.2
BC.3 N0.53 +8.806	8.81	1.08	1.07	9.4	BC.3 N0.53 +8.806	8.81	2.44	2.43	21.4
N0.54	11.19	1.12	1.10	12.3	N0.54	11.19	2.47	2.46	27.5
N0.55	20.00	1.25	1.19	23.8	N0.55	20.00	2.62	2.55	51.0
N0.55 +12.434	12.43	1.25	1.25	15.5	N0.55 +12.459	12.46	2.62	2.62	32.6
小 計	212.43			m2 212.8	小 計	212.46			m2 435.4
合 計	841.91			m2 693.3	合 計	843.29			m2 1,147.0

測点間隔 20.000m

型枠工計算書 (1/3)									
測 点	型枠工 (左側)				測 点	型枠工 (右側)			
	距 離	延 長	平 均 延 長	面 積 (m2)		距 離	延 長	平 均 延 長	面 積 (m2)
N0.13 +10.532		0.07			N0.13 +9.168		0.08		
N0.14	9.47	0.07	0.07	0.7	N0.14	10.83	0.08	0.08	0.9
N0.15	20.00	0.07	0.07	1.4	N0.15	20.00	0.08	0.08	1.6
KE1-2 N0.15 +4.469	4.47	0.07	0.07	0.3	KE1-2 N0.15 +4.469	4.47	0.08	0.08	0.4
N0.16	15.53	0.07	0.07	1.1	N0.16	15.53	0.08	0.08	1.2
N0.17	20.00	0.08	0.08	1.6	N0.17	20.00	0.08	0.08	1.6
N0.18	20.00	0.08	0.08	1.6	N0.18	20.00	0.08	0.08	1.6
KA1-2, KA2-1 N0.18 +5.219	5.22	0.08	0.08	0.4	KA1-2 N0.18 +5.219	5.22	0.08	0.08	0.4
N0.19	14.78	0.08	0.08	1.2	N0.19	14.78	0.08	0.08	1.2
N0.20	20.00	0.07	0.08	1.6	N0.20	20.00	0.08	0.08	1.6
N0.20 +12.364	12.36	0.07	0.07	0.9	N0.20 +12.364	12.36	0.08	0.08	1.0
N0.20 +18.270	5.91	0.07	0.07	0.4	N0.20 +18.270	5.91	0.08	0.08	
N0.21	1.73	0.07	0.07	0.1	N0.21	1.73	0.08	0.08	0.1
KE2-1 N0.21 +5.969	5.97	0.07	0.07	0.4	KE2-1 N0.21 +5.969	5.97	0.08	0.08	0.5
N0.22	14.03	0.10	0.09	1.3	N0.22	14.03	0.07	0.08	1.1
N0.23	20.00	0.10	0.10	2.0	N0.23	20.00	0.07	0.07	1.4
N0.24	20.00	0.08	0.09	1.8	N0.24	20.00	0.07	0.07	1.4
KE2-2 N0.24 +16.212	16.21	0.08	0.08	1.3	N0.24 +5.969	5.97	0.08	0.08	0.5
N0.25	3.79	0.08	0.08	0.3	N0.25	14.03	0.08	0.08	1.1
N0.26	20.00	0.07	0.08	1.6	N0.26	20.00	0.07	0.08	1.6
N0.26 +6.095	6.10	0.07	0.07	0.4	N0.26 +6.712	6.71	0.07	0.07	0.5
N0.26 +10.761	4.67	0.08	0.08		N0.26 +10.821	4.11	0.08	0.08	
N0.27	9.24	0.08	0.08	0.7	N0.27	9.18	0.08	0.08	0.7
KA2-2 N0.27 +16.962	16.96	0.08	0.08	1.4	KA2-2 N0.27 +16.962	16.96	0.08	0.08	1.4
小 計	286.44			m2 22.5	小 計	287.79			m2 21.8

測点間隔 20.000m

型枠工計算書 (2/3)									
測 点	型枠工 (左側)				測 点	型枠工 (右側)			
	距 離	延 長	平 均 延 長	面 積 (m2)		距 離	延 長	平 均 延 長	面 積 (m2)
NO. 28	3.04	0.08	0.08	0.2	NO. 28	3.04	0.08	0.08	0.2
NO. 29	20.00	0.08	0.08	1.6	NO. 29	20.00	0.08	0.08	1.6
NO. 30	20.00	0.08	0.08	1.6	NO. 30	20.00	0.08	0.08	1.6
NO. 31	20.00	0.08	0.08	1.6	NO. 31	20.00	0.08	0.08	1.6
NO. 31 +19.520	19.52	0.08	0.08	1.6	NO. 31 +19.520	19.52	0.08	0.08	1.6
NO. 32	0.48	0.00	0.04		NO. 32	0.48	0.00	0.04	
NO. 32 +3.607	3.61	0.08	0.04		NO. 32 +3.691	3.69	0.08	0.04	
NO. 33	16.39	0.08	0.08	1.3	NO. 33	16.31	0.08	0.08	1.3
NO. 34	20.00	0.08	0.08	1.6	NO. 34	20.00	0.08	0.08	1.6
NO. 35	20.00	0.08	0.08	1.6	NO. 35	20.00	0.08	0.08	1.6
NO. 36	20.00	0.08	0.08	1.6	NO. 36	20.00	0.08	0.08	1.6
NO. 37	20.00	0.08	0.08	1.6	NO. 37	20.00	0.04	0.06	1.2
NO. 37 +12.093	12.09	0.08	0.08	1.0	NO. 37 +12.319	12.32	0.04	0.04	0.5
NO. 37 +16.925	4.83	0.10	0.09		NO. 37 +16.417	4.10	0.10	0.07	
NO. 38	3.08	0.10	0.10	0.3	NO. 38	3.58	0.10	0.10	0.4
NO. 39	20.00	0.08	0.09	1.8	NO. 39	20.00	0.08	0.09	1.8
NO. 40	20.00	0.08	0.08	1.6	NO. 40	20.00	0.08	0.08	1.6
NO. 41	20.00	0.08	0.08	1.6	NO. 41	20.00	0.22	0.15	3.0
NO. 42	20.00	0.08	0.08	1.6	NO. 42	20.00	0.22	0.22	4.4
NO. 43	20.00	0.07	0.08	1.6	NO. 43	20.00	0.22	0.22	4.4
NO. 43 +5.246	5.25	0.07	0.07	0.4	NO. 43 +5.967	5.97	0.22	0.22	1.3
NO. 43 +9.128	3.88	0.04	0.06		NO. 43 +8.940	2.97	0.08	0.15	
NO. 44	10.87	0.04	0.04	0.4	NO. 44	11.06	0.08	0.08	0.9
NO. 45	20.00	0.08	0.06	1.2	NO. 45	20.00	0.08	0.08	1.6
小 計	343.04			25.8 ^{m2}	小 計	343.04			33.8 ^{m2}

測点間隔 20.000m

型枠工計算書 (3/3)									
測 点	型枠工 (左側)				測 点	型枠工 (右側)			
	距 離	延 長	平 均 延 長	面 積 (m2)		距 離	延 長	平 均 延 長	面 積 (m2)
N0.46	20.00	0.08	0.08	1.6	N0.46	20.00	0.08	0.08	1.6
N0.47	20.00	0.08	0.08	1.6	N0.47	20.00	0.08	0.08	1.6
N0.48	20.00	0.08	0.08	1.6	N0.48	20.00	0.08	0.08	1.6
N0.48 +17.549	17.55	0.08	0.08	1.4	N0.48 +18.427	18.43	0.08	0.08	1.5
N0.49 +2.471	4.92	0.07	0.08		N0.49 +2.436	4.01	0.22	0.15	
N0.50	17.53	0.07	0.07	1.2	N0.50	17.56	0.22	0.22	3.9
N0.51	20.00	0.06	0.07	1.4	N0.51	20.00	0.22	0.22	4.4
N0.52	20.00	0.00	0.03	0.6	N0.52	20.00	0.22	0.22	4.4
N0.53	20.00	0.01	0.01	0.2	N0.53	20.00	0.22	0.22	4.4
BC.3 N0.53 +8.806	8.81	0.02	0.02	0.2	BC.3 N0.53 +8.806	8.81	0.22	0.22	1.9
N0.54	11.19	0.03	0.03	0.3	N0.54	11.19	0.22	0.22	2.5
N0.55	20.00	0.02	0.03	0.6	N0.55	20.00	0.22	0.22	4.4
N0.55 +12.434	12.43	0.02	0.02	0.2	N0.55 +12.459	12.46	0.22	0.22	2.7
小 計	212.43			m2 10.9	小 計	212.46			m2 34.9
合 計	841.91			m2 59.2	合 計	843.29			m2 90.5

測点間隔 20.000m

防草コンクリート計算書 (1/3)

測 点	防草コンクリート (左側)				測 点	防草コンクリート (右側)			
	距 離	延 長	平 均 延 長	面 積 (m2)		距 離	延 長	平 均 延 長	面 積 (m2)
N0.13 +10.532		2.06			N0.13 +9.168		2.15		
N0.14	9.47	2.06	2.06	19.5	N0.14	10.83	2.15	2.15	23.3
N0.15	20.00	2.06	2.06	41.2	N0.15	20.00	1.12	1.64	32.8
KE1-2 N0.15 +4.469	4.47	2.06	2.06	9.2	KE1-2 N0.15 +4.469	4.47	0.94	1.03	4.6
N0.16	15.53	2.04	2.05	31.8	N0.16	15.53	0.87	0.91	人力 14.1
N0.17	20.00	1.11	1.58	31.6	N0.17	20.00	1.25	1.06	21.2
N0.18	20.00	1.05	1.08	21.6	N0.18	20.00	1.15	1.20	24.0
KA1-2, KA2-1 N0.18 +5.219	5.22	0.95	1.00	5.2	KA1-2 N0.18 +5.219	5.22	1.07	1.11	5.8
N0.19	14.78	0.71	0.83	12.3	N0.19	14.78	0.91	0.99	人力 14.6
N0.20	20.00	0.50	0.61	12.2	N0.20	20.00	0.77	0.84	人力 16.8
N0.20 +12.364	12.36	0.50	0.50	6.2	N0.20 +12.364	12.36	0.77	0.77	人力 9.5
N0.20 +18.270	5.91	0.50	0.50	3.0	N0.20 +18.270	5.91	0.70	0.74	
N0.21	1.73	0.50	0.50	0.9	N0.21	1.73	0.70	0.70	人力 1.2
KE2-1 N0.21 +5.969	5.97	0.50	0.50	3.0	KE2-1 N0.21 +5.969	5.97	0.74	0.72	人力 4.3
N0.22	14.03	0.82	0.66	9.3	N0.22	14.03	0.50	0.62	人力 8.7
N0.23	20.00	0.91	0.87	17.4	N0.23	20.00	0.50	0.50	人力 10.0
N0.24	20.00	0.95	0.93	18.6	N0.24	20.00	0.50	0.50	人力 10.0
KE2-2 N0.24 +16.212	16.21	1.21	1.08	17.5	KE2-2 N0.24 +16.212	16.21	2.12	1.31	21.2
N0.25	3.79	1.39	1.30	4.9	N0.25	3.79	2.29	2.21	8.4
N0.26	20.00	1.71	1.55	31.0	N0.26	20.00	2.57	2.43	48.6
N0.26 +6.095	6.10	1.71	1.71	10.4	N0.26 +6.712	6.71	2.57	2.57	17.2
N0.26 +10.761	4.67	1.72	1.72		N0.26 +10.821	4.11	2.41	2.49	
N0.27	9.24	1.72	1.72	15.9	N0.27	9.18	2.41	2.41	22.1
KA2-2 N0.27 +16.962	16.96	1.52	1.62	27.5	KA2-2 N0.27 +16.962	16.96	2.09	2.25	38.2
小 計	286.44		人力 機械	88.1 262.1	小 計	287.79		人力 機械	89.2 267.4

測点間隔 20.000m


防草コンクリート計算書 (2/3)									
測 点	防草コンクリート (左側)				測 点	防草コンクリート (右側)			
	距 離	延 長	平 均 延 長	面 積 (m2)		距 離	延 長	平 均 延 長	面 積 (m2)
NO. 28	3.04	1.44	1.48	4.5	NO. 28	3.04	2.12	2.11	6.4
NO. 29	20.00	1.21	1.33	26.6	NO. 29	20.00	1.87	2.00	40.0
NO. 30	20.00	1.50	1.36	27.2	NO. 30	20.00	2.00	1.94	38.8
NO. 31	20.00	1.65	1.58	31.6	NO. 31	20.00	2.09	2.05	41.0
NO. 31 +19.520	19.52	1.65	1.65	32.2	NO. 31 +19.520	19.52	2.09	2.09	40.8
NO. 32	0.48	0.00	0.83		NO. 32	0.48	0.00	1.05	
NO. 32 +3.607	3.61	1.55	0.78		NO. 32 +3.691	3.69	2.07	1.04	
NO. 33	16.39	1.55	1.55	25.4	NO. 33	16.31	2.07	2.07	33.8
NO. 34	20.00	1.51	1.53	30.6	NO. 34	20.00	1.90	1.99	39.8
NO. 35	20.00	1.03	1.27	25.4	NO. 35	20.00	1.42	1.66	33.2
NO. 36	20.00	1.64	1.34	26.8	NO. 36	20.00	2.25	1.84	36.8
NO. 37	20.00	1.94	1.79	35.8	NO. 37	20.00	2.48	2.37	47.4
NO. 37 +12.093	12.09	1.94	1.94	23.5	NO. 37 +12.319	12.32	2.48	2.48	30.6
NO. 37 +16.925	4.83	1.68	1.81		NO. 37 +16.417	4.10	2.23	2.36	
NO. 38	3.08	1.68	1.68	5.2	NO. 38	3.58	2.23	2.23	8.0
NO. 39	20.00	1.66	1.67	33.4	NO. 39	20.00	2.30	2.27	45.4
NO. 40	20.00	1.36	1.51	30.2	NO. 40	20.00	1.94	2.12	42.4
NO. 41	20.00	1.12	1.24	24.8	NO. 41	20.00	2.24	2.09	41.8
NO. 42	20.00	1.59	1.36	27.2	NO. 42	20.00	2.72	2.48	49.6
NO. 43	20.00	1.82	1.71	34.2	NO. 43	20.00	3.16	2.94	58.8
NO. 43 +5.246	5.25	1.82	1.82	9.6	NO. 43 +5.967	5.97	3.16	3.16	18.9
NO. 43 +9.128	3.88	1.79	1.81		NO. 43 +8.940	2.97	2.47	2.82	
NO. 44	10.87	1.79	1.79	19.5	NO. 44	11.06	2.47	2.47	27.3
NO. 45	20.00	1.50	1.65	33.0	NO. 45	20.00	2.02	2.25	45.0
小 計	343.04		機械	506.7	小 計	343.04		機械	725.8

測点間隔 20.000m

防草コンクリート計算書 (3/3)									
測 点	防草コンクリート (左側)				測 点	防草コンクリート (右側)			
	距 離	延 長	平 均 延 長	面 積 (m2)		距 離	延 長	平 均 延 長	面 積 (m2)
N0.46	20.00	0.97	1.24	24.8	N0.46	20.00	1.69	1.86	37.2
N0.47	20.00	1.16	1.07	21.4	N0.47	20.00	1.86	1.78	35.6
N0.48	20.00	1.81	1.49	29.8	N0.48	20.00	2.44	2.15	43.0
N0.48 +17.549	17.55	1.81	1.81	31.8	N0.48 +18.427	18.43	2.44	2.44	45.0
N0.49 +2.471	4.92	1.83	1.82		N0.49 +2.436	4.01	3.20	2.82	
N0.50	17.53	1.83	1.83	32.1	N0.50	17.56	3.20	3.20	56.2
N0.51	20.00	1.96	1.90	38.0	N0.51	20.00	3.34	3.27	65.4
N0.52	20.00	1.58	1.77	35.4	N0.52	20.00	3.07	3.21	64.2
N0.53	20.00	1.65	1.62	32.4	N0.53	20.00	3.17	3.12	62.4
BC.3 N0.53 +8.806	8.81	1.68	1.67	14.7	BC.3 N0.53 +8.806	8.81	3.20	3.19	28.1
N0.54	11.19	1.72	1.70	19.0	N0.54	11.19	3.23	3.22	36.0
N0.55	20.00	1.85	1.79	35.8	N0.55	20.00	3.38	3.31	66.2
N0.55 +12.434	12.43	1.85	1.85	23.0	N0.55 +12.459	12.46	3.38	3.38	42.1
小 計	212.43		機械	338.2	小 計	212.46		機械	581.4
合 計	人力	120.00		88.1	合 計	人力	124.40		89.2
	機械	721.91		1,107.0		機械	718.89		1,574.6
	計	841.91		1,195.1		計	843.29		1,663.8

張りコンクリート(人力施工、機械施工) 単位数量計算書

*張りコンクリートの伸縮目地(t=10mm)は10m間隔で設置

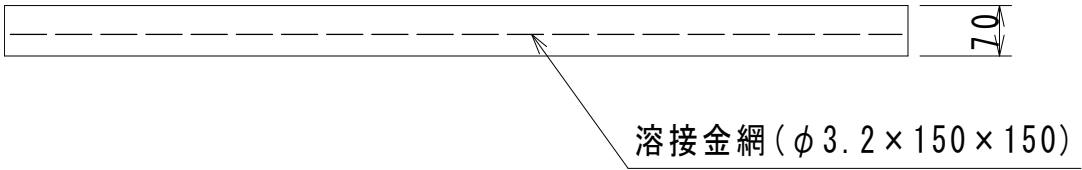

(10㎡当り)

種 別	計 算 式	数 量
コンクリート打設工 (防草コンクリート)	人力施工、機械施工	10.0 m ²
コンクリート (18-8-25高炉)	ロス率 $V = 0.07 \times 10.0 \times 1.21$	= 0.8 m ³
型 枠 (防草コンクリート)	一式面積 $A = 149.7 \text{ m}^2$, 張コン全面積 $A = 2,858.9 \text{ m}$ 単位型枠面積 $W = 149.7 / 2,858.9 = 0.05 \text{ m}^2/\text{m}^2$ 10㎡当り $A = 0.05 \times 10.0$	= 0.5 m ²
目地材 (t=10cm)	*諸雑費に含まれるため計上不要	
溶接金網設置工		10.0 m ²
溶接金網 (φ 3.2×150×150)		10.0 m ²
スペーサー (かぶり35mm)	$N = 10.0 / 1.0$	= 10.0 個
養生工		10.0 m ²

4 仮設工

数量集計表

[illegible]

種 別	計 算 式	数 量
(1) 交通管理工 1) 交通誘導警備	=	92.0 人

5 準備費

数量集計表

[illegible]

測点間隔 20.000m

除草面積計算書 (1/3)									
測 点	除草 (左側)				測 点	除草 (右側)			
	距 離	延 長	平 均 延 長	面 積 (m2)		距 離	延 長	平 均 延 長	面 積 (m2)
N0.13 +10.532		1.74			N0.13 +9.168		1.38		
N0.14	9.47	2.08	1.91	18.1	N0.14	10.83	2.17	1.78	19.3
N0.15	20.00	2.08	2.08	41.6	N0.15	20.00	1.15	1.66	33.2
KE1-2 N0.15 +4.469	4.47	2.09	2.09	9.3	KE1-2 N0.15 +4.469	4.47	0.97	1.06	4.7
N0.16	15.53	2.06	2.08	32.3	N0.16	15.53	0.90	0.94	14.6
N0.17	20.00	1.14	1.60	32.0	N0.17	20.00	1.28	1.09	21.8
N0.18	20.00	1.07	1.11	22.2	N0.18	20.00	1.19	1.24	24.8
KA1-2, KA2-1 N0.18 +5.219	5.22	0.97	1.02	5.3	KA1-2 N0.18 +5.219	5.22	1.10	1.15	6.0
N0.19	14.78	0.71	0.84	12.4	N0.19	14.78	0.91	1.01	14.9
N0.20	20.00	0.50	0.61	12.2	N0.20	20.00	0.77	0.84	16.8
N0.20 +12.364	12.36	0.50	0.50	6.2	N0.20 +12.364	12.36	0.77	0.77	9.5
N0.20 +18.270	5.91	0.50	0.50	3.0	N0.20 +18.270	5.91	0.70	0.74	
N0.21	1.73	0.50	0.50	0.9	N0.21	1.73	0.70	0.70	1.2
KE2-1 N0.21 +5.969	5.97	0.50	0.50	3.0	KE2-1 N0.21 +5.969	5.97	0.74	0.72	4.3
N0.22	14.03	0.82	0.66	9.3	N0.22	14.03	0.50	0.62	8.7
N0.23	20.00	0.91	0.87	17.4	N0.23	20.00	0.50	0.50	10.0
N0.24	20.00	0.97	0.94	18.8	N0.24	20.00	0.50	0.50	10.0
KE2-2 N0.24 +16.212	16.21	1.24	1.11	18.0	N0.24 +5.969	5.97	2.15	1.33	7.9
N0.25	3.79	1.41	1.33	5.0	N0.25	14.03	2.31	2.23	31.3
N0.26	20.00	1.73	1.57	31.4	N0.26	20.00	2.49	2.40	48.0
N0.26 +6.095	6.10	1.73	1.73	10.6	N0.26 +6.712	6.71	2.49	2.49	16.7
N0.26 +10.761	4.67	1.73	1.73		N0.26 +10.821	4.11	2.49	2.49	
N0.27	9.24	1.75	1.74	16.1	N0.27	9.18	2.43	2.46	22.6
KA2-2 N0.27 +16.962	16.96	1.54	1.65	28.0	KA2-2 N0.27 +16.962	16.96	2.11	2.27	38.5
小 計	286.44			353.1 ^{m2}	小 計	287.79			364.8 ^{m2}

測点間隔 20.000m

除草面積計算書 (2/3)									
測 点	除草 (左側)				測 点	除草 (右側)			
	距 離	延 長	平 均 延 長	面 積 (m2)		距 離	延 長	平 均 延 長	面 積 (m2)
NO. 28	3.04	1.46	1.50	4.6	NO. 28	3.04	2.14	2.13	6.5
NO. 29	20.00	1.24	1.35	27.0	NO. 29	20.00	1.90	2.02	40.4
NO. 30	20.00	1.52	1.38	27.6	NO. 30	20.00	2.03	1.97	39.4
NO. 31	20.00	1.67	1.60	32.0	NO. 31	20.00	2.12	2.08	41.6
NO. 31 +19.520	19.52	1.67	1.67	32.6	NO. 31 +19.520	19.52	2.12	2.12	41.4
NO. 32	0.48	0.00	0.84	0.4	NO. 32	0.48	0.00	1.06	0.5
NO. 32 +3.607	3.61	1.58	0.79		NO. 32 +3.691	3.69	2.10	1.05	
NO. 33	16.39	1.58	1.58	25.9	NO. 33	16.31	2.10	2.10	34.3
NO. 34	20.00	1.54	1.56	31.2	NO. 34	20.00	1.93	2.02	40.4
NO. 35	20.00	1.06	1.30	26.0	NO. 35	20.00	1.45	1.69	33.8
NO. 36	20.00	1.67	1.37	27.4	NO. 36	20.00	2.27	1.86	37.2
NO. 37	20.00	1.99	1.83	36.6	NO. 37	20.00	2.50	2.39	47.8
NO. 37 +12.093	12.09	1.99	1.99	24.1	NO. 37 +12.319	12.32	2.50	2.50	30.8
NO. 37 +16.925	4.83	1.99	1.99		NO. 37 +16.417	4.10	2.50	2.50	
NO. 38	3.08	1.71	1.85	5.7	NO. 38	3.58	2.26	2.38	8.5
NO. 39	20.00	1.71	1.71	34.2	NO. 39	20.00	2.33	2.30	46.0
NO. 40	20.00	1.38	1.55	31.0	NO. 40	20.00	1.97	2.15	43.0
NO. 41	20.00	1.15	1.27	25.4	NO. 41	20.00	2.16	2.07	41.4
NO. 42	20.00	1.61	1.38	27.6	NO. 42	20.00	2.64	2.40	48.0
NO. 43	20.00	1.84	1.73	34.6	NO. 43	20.00	3.08	2.86	57.2
NO. 43 +5.246	5.25	1.84	1.84	9.7	NO. 43 +5.967	5.97	3.08	3.08	18.4
NO. 43 +9.128	3.88	1.84	1.84		NO. 43 +8.940	2.97	3.08	3.08	
NO. 44	10.87	1.81	1.83	19.9	NO. 44	11.06	2.50	2.79	30.9
NO. 45	20.00	1.53	1.67	33.4	NO. 45	20.00	2.04	2.27	45.4
小 計	343.04			516.9 ^{m2}	小 計	343.04			732.9 ^{m2}

測点間隔 20.000m

除草面積計算書 (3/3)									
測 点	除草 (左側)				測 点	除草 (右側)			
	距 離	延 長	平 均 延 長	面 積 (m2)		距 離	延 長	平 均 延 長	面 積 (m2)
N0. 46	20.00	1.00	1.27	25.4	N0. 46	20.00	1.71	1.88	37.6
N0. 47	20.00	1.19	1.10	22.0	N0. 47	20.00	1.88	1.80	36.0
N0. 48	20.00	1.84	1.52	30.4	N0. 48	20.00	2.46	2.17	43.4
N0. 48 +17.549	17.55	1.84	1.84	32.3	N0. 48 +18.427	18.43	2.46	2.46	45.3
N0. 49 +2.471	4.92	1.84	1.84		N0. 49 +2.436	4.01	2.46	2.46	
N0. 50	17.53	1.85	1.85	32.4	N0. 50	17.56	3.05	2.76	48.5
N0. 51	20.00	1.98	1.92	38.4	N0. 51	20.00	3.19	3.12	62.4
N0. 52	20.00	1.60	1.79	35.8	N0. 52	20.00	2.94	3.07	61.4
N0. 53	20.00	1.67	1.64	32.8	N0. 53	20.00	3.04	2.99	59.8
BC. 3 N0. 53 +8.806	8.81	1.70	1.69	14.9	BC. 3 N0. 53 +8.806	8.81	3.07	3.06	27.0
N0. 54	11.19	1.75	1.73	19.4	N0. 54	11.19	3.09	3.08	34.5
N0. 55	20.00	1.87	1.81	36.2	N0. 55	20.00	3.37	3.23	64.6
N0. 55 +12.434	12.43	1.87	1.87	23.2	N0. 55 +12.459	12.46	3.37	3.37	42.0
小 計	212.43			m2 343.2	小 計	212.46			m2 562.5
合 計	841.91			m2 1213.2	合 計	843.29			m2 1660.2

除草面積合計 = 1,213.2 + 1,660.2 = 2,873 m2

除草残材処分 = 2,873 × 0.001 t/m2 = 2.9 t